

Supplementary Information

Nanocomposites Based on Cassava Starch and Chitosan-Modified Clay: Physico-Mechanical Properties and Biodegradability in Simulated Compost Soil

Gustavo F. Perotti,^{a,b,c} Thitisilp Kijchavengkul,^{c,d} Rafael A. Auras^c and Vera R. L. Constantino*^b

^aInstituto de Ciências Exatas e Tecnologia, Universidade Federal do Amazonas, Rua Nossa Senhora do Rosário, 3863, 69103-128 Itacoatiara-AM, Brazil

^bInstituto de Química, Universidade de São Paulo, Av. Prof. Lineu Prestes 748, 05508-000 São Paulo-SP, Brazil

^cSchool of Packaging, Michigan State University, 448 Wilson Road, 48824 East Lansing-MI, USA

^dMahidol University Kanchanaburi Campus, 199 M.9 Lumsum Kanchanaburi - Sangkraburi Road, Sai Yok, Sai Yok District, Kanchanaburi, Thailand

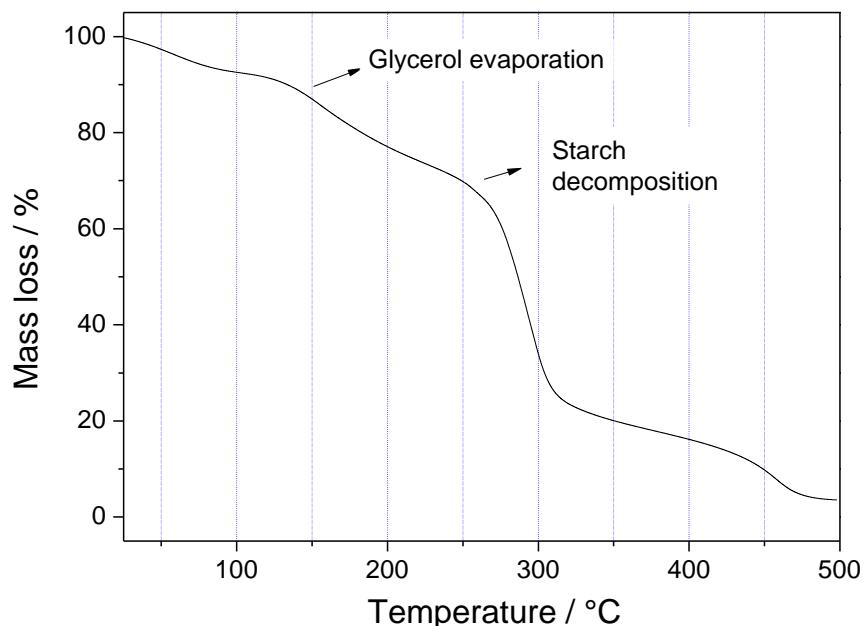


Figure S1. TGA curve of starch-based nanocomposite containing 5.0% of pristine Veegum HS clay. Synthetic air atmosphere of 50 mL min⁻¹.

*e-mail: vrlconst@iq.usp.br

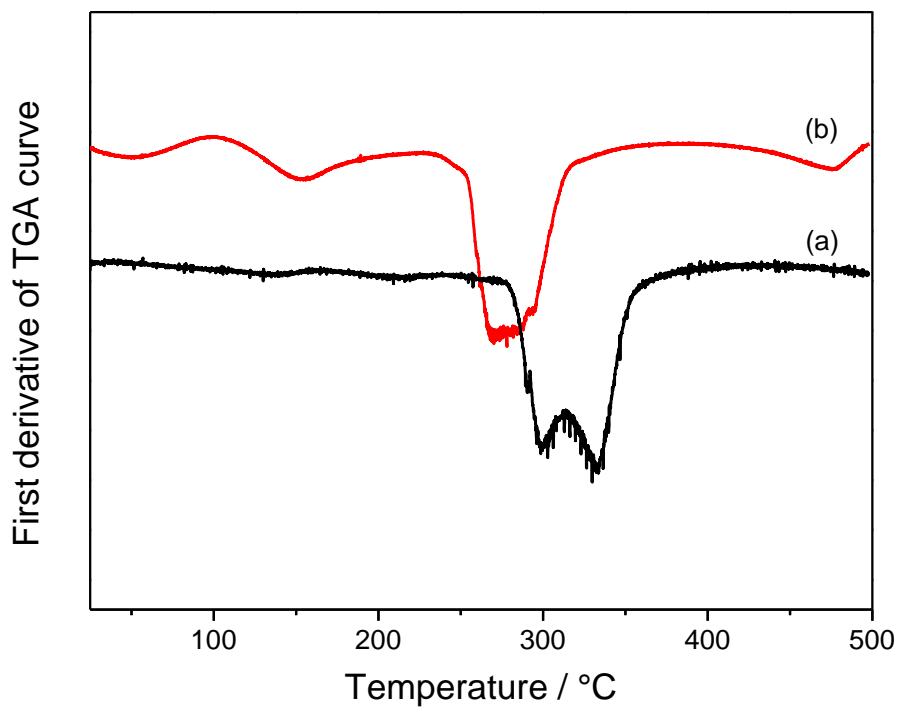


Figure S2. First derivative of TGA curves of (a) TPS and (b) Star/Vee-Chit 5.0%. Synthetic air atmosphere of 50 mL min⁻¹.